



**Dedicated & Professional in HMI
Quality Products
State-of-the-Art Technology
Satisfy Service**

TEL: (886)2-22286770

**Address: 3F, 910 Chung Cheng Rd. Chung Ho city, Taipei Hsien ,
Taiwan**

Website: www.weintek.com

MT612 X

X86 CPU Core Touch Panel Computer with 12.1" SVGA TFT Display



Introduction

The MT612X is a miniature and compact platform that has excellent system performance and function. The x86 CPU Core provides the maximum compatibility with the vast amount of Internet content available while the intelligent integration of several other functions, including graphics, makes the AMD Geode™ LX processor a true system level multimedia solution.

Specification

- **Construction:** plastic molding housing
- **Display:** 12.1" SVGA color TFT LCD
- **CPU and Core Logic:** AMD Geode™ LX800/500MHz core processor
- **System BIOS:** award PnP BIOS
- **DRAM:** 256MB on board DDR-400MHz SDRAM
- **Storage:** 44-pin IDE interface
- **I/Os:**
 - 3 serial ports:
 - Com1: RS-232/RS-485 2w/4w,
 - Com2: RS-232,
 - Com3: RS-232/RS-485 2w
 - 1 Ethernet port (10/100Base-T)
 - 3 USB 2.0 full-speed host ports (12Mbps)
 - 1 Mini USB full-speed port (12Mbps)
- **Sound Output:** AC'97 Stereo codec
- **RTC:** Built-in
- **Power Input:** 24 V_{DC}, 0.8A maximum
- **Dimensions (W x H x D):** 322 x 243 x 51mm
- **Weight:** approx. 2.1 KGS

Features

- 12.1" SVGA 18-bit TFT LCD
- AMD Geode™ LX800/500MHz core processor speed
- Fan-less cooling system
- NEMA4/IP65 compliant front panel
- On-board 256MB DDR-400MHz SDRAM
- 44-pin IDE interface (D.O.M)
- High performance 2D accelerator graphic controller, supporting 8~128MB shared display memory

LCD Display

Display Type	TFT Color LCD
Display Size (Diagonal)	12.1"
Max. Colors	65536
Resolution	800 x 600
Pixel Pitch (H x V / mm)	0.3075 x 0.3075
Viewing Angle (°)	50/60/70/70 (T/B/R/L)
Luminance (cd/m ²)	450
Backlight	2 x CCFLs
Contrast Ratio	600:1

Touch screen

- **Type:** 4-wire, analog resistive
- **Resolution:** continuous
- **Light Transmission:** approx. 80%
- **Life:** 1 million activation minimum

Environmental Specification

- **Operating Temperature:** 0° ~ 45°C (32° ~ 113°F)
- **Relative Humidity:** 10% ~ 90% @ 40°C, non-condensing
- **Shock (Operation):** 10 to 25Hz (X,Y,Z directions/2G/30 minutes)
- **EMI:** Complies with FCC Class A
- **CE:** Complies with EN50081-2 and EN50082-2 standards
- **Front Panel meets NEMA4 / IP65**

Ordering Information

XPE-1G XPE license + 1G DOM




1GB Disk On Module and Windows Embedded XP OS inside.

CE-256M CE license + 256M DOM




256MB Disk On Module and Windows CE 5.0 OS inside.


Dimensions of MT612X




Top View

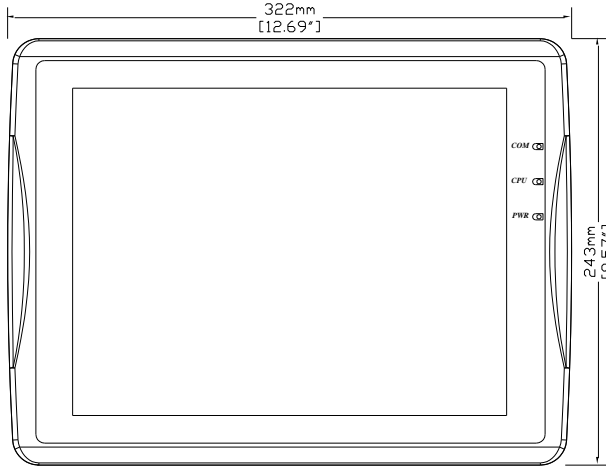


Front View




Side View

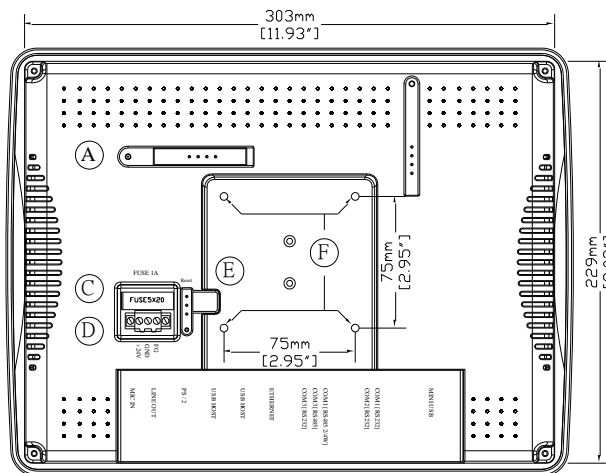

Rear View

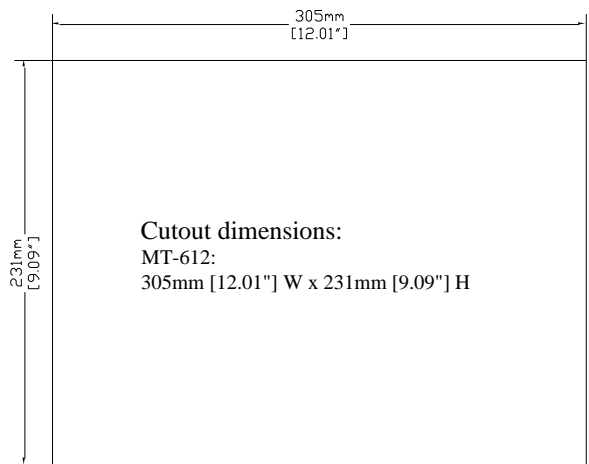

Cutout dimensions:
MT-612:
305mm [12.01" W x 231mm [9.09" H

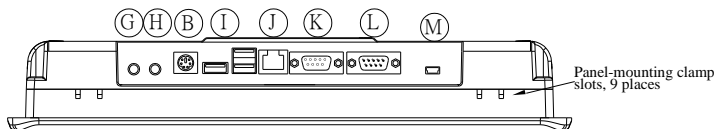

Bottom View

- | | | | |
|---|--------------------------|---|------------------------------------|
| A | IDE Interface (DOM Slot) | H | Line Out |
| B | PS/2 Port Connector | I | USB Host Port x 3 |
| C | Fuse | J | Ethernet Port 10/100 Base-T |
| D | Power Connector | K | Com1 RS485, Com3 RS485, Com3 RS232 |
| E | Reset Button | L | Com1 RS232, Com2 RS232 |
| F | VESA 75mm Screw Holes | M | Mini USB Port x 1 |
| G | Mic In | | |